












Pride in our American Heritage and renewed interest in its early history has greatly influenced U.S. architecture. With careful research and design, Baldwin has authentically reproduced a piece of that heritage – colonial rim locks.

- > Constructed with solid forged brass parts for exceptional durability and smooth operation
- > Trim designs secured to a broached spindle with an epoxy (resin) coated set screw – prohibits screw from loosening
- > Interior rim locks use bit keys. Bit keys may be ordered fixed permanently into the lock by ordering as .RBIT or .LBIT configurations.

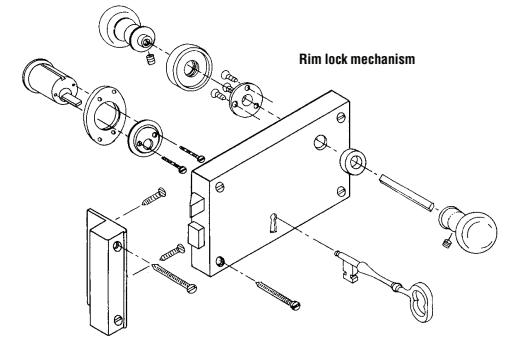

NOTE: Hand of door is always determined from outside
IMPORTANT: A dummy trim rim lock must be used on ALL pairs of reverse bevel doors

RIM LOCKS – PASSAGE, PRIVACY & ENTRANCE



Full Dummy prepared as a strike for all function rim locks

Full Dummy Rim Locks

Hollow rim lock case (without any working mechanism)

INCLUDED:

- 5030 Knobs – pair
- 5002 Rose – half pair

Passage Rim Locks

Latch bolt by knob either side

INCLUDED:

- 5755 Bit key
- Key can be permanently fitted at extra charge (RBIT, LBIT)

- 5030 Knobs – pair
- 5002 Rose – half pair

Privacy Rim Locks

Latch bolt by knob either side

Dead bolt by bit key either side

INCLUDED:

- 5755 Bit key – used w/ privacy function
- Key can be permanently fitted at extra charge (RBIT, LBIT)

- 0406 Cover Plate
- 5753 Emergency key – s/b stored in readily accessible place

- 5030 Knobs – pair
- 5002 Rose – half pair

Entrance Rim Locks

Latch bolt by knob either side

Dead bolt by key outside and slide bolt inside

INCLUDED:

- 8333 Cylinder
- 6755 Cylinder Cover Plate
- 6757 Cylinder Cover Plate*
- 5030 Knobs – pair
- 5002 Rose – half pair

* Only in case of 5704.

031, 033, 034
038, 040, 050
060, 102, 112
150, 151, 190
260, 264
003
055
056

Item #	Description	Function	Wt.	Backset		
5600.xxx.R (L, RR, LR)	Small Vertical Rim Lock	Passage	3.7	2.75"	\$700	740
5600.xxx.RFD (LFD)	Small Vertical Rim Lock	Full Dummy	3.7	2.75"	350	390
5602.xxx.R (L, RR, LR)	Small Vertical Rim Lock	Privacy	4.0	2.75"	825	865
5602.xxx.RFD (LFD)	Small Vertical Rim Lock	Full Dummy	3.7	2.75"	425	465
5604.xxx.R (L, RR, LR)*	Small Vertical Rim Lock	Entrance	4.6	2.75"	900	940
5604.xxx.RFD (LFD)*	Small Vertical Rim Lock	Full Dummy	4.6	2.75"	450	490
5630.xxx.R (L, RR, LR)	7" Horizontal Rim Lock	Passage	4.4	5.25"	775	815
5630.xxx.RFD (LFD)	7" Horizontal Rim Lock	Full Dummy	4.4	5.25"	375	415
5632.xxx.R (L, RR, LR)	7" Horizontal Rim Lock	Privacy	4.8	5.25"	860	890
5634.xxx.R (L, RR, LR)	7" Horizontal Rim Lock	Entrance	5.5	5.25"	960	990
5634.xxx.RFD (LFD)	7" Horizontal Rim Lock	Full Dummy	5.5	5.25"	475	515
5701.xxx.R (L, RR, LR)	Small Horizontal Rim Lock	Passage	3.8	3.5"	700	740
5701.xxx.RFD (LFD)	Small Horizontal Rim Lock	Full Dummy	3.8	3.5"	350	390
5702.xxx.R (L, RR, LR)	Small Horizontal Rim Lock	Privacy	4.2	3.5"	825	865
5702.xxx.RFD (LFD)	Small Horizontal Rim Lock	Full Dummy	3.7	3.5"	425	465
5704.xxx.R (L, RR, LR)	Small Horizontal Rim Lock	Entrance	4.6	3.5"	900	940
5704.xxx.RFD (LFD)	Small Horizontal Rim Lock	Full Dummy	4.6	3.5"	450	490

> RIM LOCKS ARE NOT REVERSIBLE – SPECIFY HAND OF DOORS

> IMPORTANT: A dummy trim rim lock must be used on ALL pairs of reverse bevel doors

> Bit Key can be permanently fitted at an extra charge of \$10

(add 'BIT' to end of suffix: eg. 5600.xxx.R becomes 5600.xxx.RBIT)

> *5604.xxx – Fixed bit key NOT available

> For 2 1/4 inch thick doors, 5 inch spindle required



Outside Trim

- 6755.xxx Cylinder Cover (Entrance only)
- 5030.xxx Knob
- 5002.xxx Rose



Inside Trim



Right Hand Show

Inside Trim



Left Hand Show

Inside Trim



Right Hand Show

5600, 5602, 5604.xxx – Small Vertical Rim Lock

- CASE: 4.75" x 3.75" x .875"
- KEEPER: 4.75" x .875" x 1.625"
- BACKSET: 2.75"

Upright design well suited for narrow stile doors
5604.xxx – Bit key NOT available.

5630, 5632, 5634.xxx – 7" Horizontal Rim Lock

- CASE: 4" x 6.75" x .875"
- KEEPER: 4" x .875" x 1.625"
- BACKSET: 5.25"

5701, 5702, 5704.xxx – Small Horizontal Rim Lock

- CASE: 3.75" x 4.75" x .875"
- KEEPER: 3.75" x .875" x 1.625"
- BACKSET: 3.5"
- TO BIT KEY: 2.375"

RIM LOCKS – ENTRANCE, SPECIAL FUNCTION

031, 033, 034
038, 040, 050
060, 102, 112
150, 151, 190
260, 264
003
055
056

Item #	Description	Function	Wt.	Backset		
5636.xxx.R (L, RR, LR)	Bevelled Rim Lock	Entrance	7.2	5.25"	\$1,250	1,290
5636.xxx.RFD (LFD)	Bevelled Rim Lock	Entrance	7.2	5.25"	625	665
5639.xxx.R (L, RR, LR)	Hollow Metal Doors Rim Lock	Entrance	7.2	5.25"	1,250	1,290
5639.xxx.RFD (LFD)	Hollow Metal Doors Rim Lock	Entrance	7.2	5.25"	625	665
5644.xxx.R (L, RR, LR)	Horizontal Cylinder Lock	Entrance	7.9	8"	1,250	1,290
5644.xxx.RFD (LFD)	Horizontal Cylinder Lock	Entrance	7.9	8"	625	665
5720.xxx.R (L, RR, LR)	Entrance Door Rim Lock	Entrance	7.8	3.5"	1,250	1,290
5720.xxx.RFD (LFD)	Entrance Door Rim Lock	Entrance	7.8	3.5"	625	665
5722.xxx	Entrance Door Rim Lock	Outside only	x	3.5"	360	380
5723.xxx.R (L)	Entrance Door Rim Lock	Inside only	x	3.5"	960	970

> RIM LOCKS ARE NOT REVERSIBLE – SPECIFY HAND OF DOORS

> IMPORTANT: A dummy trim rim lock must be used on ALL pairs of reverse bevel doors

> Bit Key can be permanently fitted at an extra charge of \$10

(add 'BIT' to end of suffix: eg. 5600.xxx.R becomes 5600.xxx.RBIT)

> For 2 1/4 inch thick doors, 5 inch spindle required

Inside Trim



5636.xxx Bevelled Rim Lock

- CASE: 5" x 7.25" x .875"
- KEEPER: 5" x 1.375" x 1.625"
- BACKSET: 5.25"
- TO BIT KEY: 4"

FRONT TO CYLINDER CENTERLINE: 3"

Latch bolt by knob either side

Dead bolt by key outside and slide bolt inside or bit key

INCLUDED:

- 8333 Cylinder
- 6755 Cylinder Cover Plate
- 5755 Bit key

Key can be permanently fitted at extra charge

- 5030 Knobs – pair
- 5002 Rose – half pair

Inside Trim



5644.xxx – Horizontal Cylinder Lock

- CASE: 5.75" x 10" x .875"
- KEEPER: 5.75" x .875" x 1.625"
- BACKSET: 8"
- TO BIT KEY: 6"

FRONT TO CYLINDER CENTERLINE: 5"

Latch bolt by knob either side


Dead bolt by key outside and slide bolt inside or bit key

INCLUDED:


- 8333 Cylinder
- 6755 Cylinder Cover Plate
- 5755 Bit key

Key can be permanently fitted at extra charge

- 5030 Knobs – pair
- 5002 Rose – half pair



OUTSIDE



INSIDE



5639.xxx – Hollow Metal Door Rim Lock

- CASE: 4" x 6.75" x .875"
- KEEPER: 4" x .875" x 1.625"
- LOCK PLATE: 4" x 6.25"
- BACKSET: 5.25"
- TO BIT KEY: 4"

FRONT TO CYLINDER CENTERLINE: 3"

NOTE: For 1.75" - 2" thick doors only

Specially fabricated lock plate for metal clad doors

Latch bolt by knob either side

Dead bolt by key outside and slide bolt inside or bit key

INCLUDED:

- 8333 Cylinder
- 6755 Cylinder Cover Plate
- 5755 Bit key
- Key can be permanently fitted at extra charge

- 0579 Filler Plate
- 5629 Lock Plate
- 5030 Knobs – pair

5720.xxx – Entrance Door Rim Lock

- CASE: 3.75" x 4.75" x .875"
- KEEPER: 3.75" x .875" x 1.625"
- BACKSET: 3.5"

FRONT TO CYLINDER CENTERLINE: 2.75"

NOTE: For 1.75" - 2" thick doors only

Latch bolt by knob either side


Dead bolt by key outside and slide bolt inside

Unusual combination of classic colonial "Pitcher Handle" sectional trim outside with Early American rim lock inside. Thumb piece operates latch and can be locked by turning cylinder/rim key from outside or sliding dead bolt from inside.


INCLUDED:

- 5722 Outside Trim – Pitcher Handle
- 5723 Inside Trim – Rim Lock
- 8333 Cylinder
- 5030 Knob – half pair

RIM LOCKS – TRIM



Rim Lock Keepers (Strikes)	Fits Rim Locks
5601 4.75" x .875" x 1.625"	5600, 5602, 5604
5631 4" x .875" x 1.625"	5630, 5632, 5634, 5639
5641 5.75" x .875" x 1.625"	5644
5671 3.75" x .875" x 1.625"	5701, 5702, 5704, 5720




Reverse Bevel Keepers (Strikes)	Fits Rim Locks
5603 4.75" x 1" x .375"	5600, 5602, 5604
5628 4" x 1" x .375"	5630, 5632, 5634, 5639
5642 5.75" x 1" x .375"	5644
5672 3.75" x 1" x .375"	5701, 5702, 5704, 5720



Scuff Plates	Fits Rim Locks
5606 4.75" x 1.875"	5600, 5602, 5604
5633 4" x 1.875"	5630, 5632, 5634, 5639
5643 5.75" x 1.875"	5644
5673 3.75" x 1.875"	5701, 5702, 5704, 5720

Item #	Description	Fits	001, 003, 034 038, 040, 050 060, 102, 112 150, 151, 190 260, 264	003 055 056
5601.xxx	Keeper (Standard Strike)	5600, 5602, 5604		
5631.xxx	Keeper (Standard Strike)	5630, 5632, 5634, 5639		\$75 85
5641.xxx	Keeper (Standard Strike)	5644		
5671.xxx	Keeper (Standard Strike)	5701, 5702, 5704, 5720		
5603.xxx	Reverse Bevel Keeper (Strike)	5600, 5602, 5604		
5628.xxx	Reverse Bevel Keeper (Strike)	5630, 5632, 5634, 5639		\$60 70
5642.xxx	Reverse Bevel Keeper (Strike)	5644		
5672.xxx	Reverse Bevel Keeper (Strike)	5701, 5702, 5704, 5720		
5606.xxx	Scuff Plate	5600, 5602, 5604		
5633.xxx	Scuff Plate	5630, 5632, 5634, 5639		\$60 70
5643.xxx	Scuff Plate	5644		
5673.xxx	Scuff Plate	5701, 5702, 5704, 5720		
5608.xxx	Exterior Lock Plate	5604		
5626.xxx	Exterior Lock Plate	5634, 5636		\$140 155
5629.xxx	Exterior Lock Plate	5639		
5674.xxx	Exterior Lock Plate	5704		

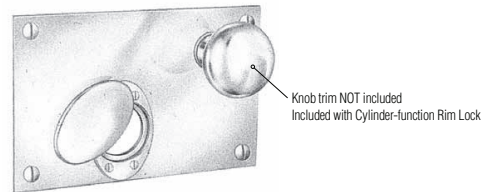

5608-5674.xxx – Exterior only Lock Plate

Item #	Door handing	Door	Plate Prep	Size	Fits Rim Lock
5608.xxx.RSKC (LSKC)*	R or L	S (Single)	KC	4.75" x 3.25"	5604
5626.xxx.RSKC (LSKC)**	R or L	S	KC	4" x 6.25"	5634, 5636
5629.xxx.RSKC (LSKC)	R or L	S	KC	4" x 6.25"	5639
5674.xxx.RSKC (LSKC)*	R or L	S	KC	3.75" x 4.25"	5704

*Does not include and cannot accommodate 6755 Swing Cover
**Beveled trim for 5626 lock plate is not available.

5626 & 5629 PLATES: 6755 Cylinder Cover Plate is secured to plate
NOTE: Rose and Cylinder trim furnished with cylinder function rim locks not used w/ Lock Plate
THICKNESS: .093"

RIM LOCKS – ACCESSORIES



0406.xxx – Colonial Emergency Release Trim & Key
SIZE: 2.312" x .687" (59 x 17mm).




5753.xxx – Emergency Release Key
SIZE: 4" (102mm) long.
Designed for use with Privacy Rim and Mortise Lock



5754.xxx – Key Plate
SIZE: 2" x 1.125" (51 x 29mm). Key Plate

5755.xxx Bit Key
SIZE: 4" (102mm) long.
FEATURES: Fits all Baldwin rim locks. Can be permanently fitted with locks to prevent unauthorized removal.



5758.xxx – Solid Brass Spacer
Designed for use with knob trim during installation on rim lock case.
Furnished standard with all rim lock sets.



6755.xxx – Cylinder Cover Plate
SIZE: 2.375" x 1.625" (60 x 41mm)
FEATURES: For use with all standard rim lock cylinders (except 5704 Rim Lock)

6755.xxx.001-3 – Blocking Rings
For 6755 Cylinder Cover Plate only



8314.xxx – Wrought Cylinder Collar for Rim Locks

Item #	Description	030, 031, 033, 034 038, 040, 050 060, 102, 112 150, 151, 190 260, 264	003 055 056
0406.xxx	Colonial Emergency Release Trim & Key	\$40	45
5753.xxx	Emergency Release Key	35	40
5754.xxx	Key Plate	15	20
5755.xxx	Bit Key	35	40
5758.xxx	Solid Brass Spacer	10	15
6755.xxx	Cylinder Lock Cover Plate	95	100
6755.xxx.001	1/16" Blocking Ring – 6755 only (040 finish only)	10	
6755.xxx.002	3/32" Blocking Ring – 6755 only (040 finish only)	10	
6755.xxx.003	1/8" Blocking Ring – 6755 only (040 finish only)	10	
8314.xxx	Wrought Cylinder Collar for Rim Locks	15	20